


produits/rivets-aveugles/rivet-eclate/alu-couleur-acier-zinguE/

# GOSTAR TRS NOIR

TÊTE RONDE STANDARD - RAL 9005 -  
ALUMINIUM ACIER ZINGUÉ

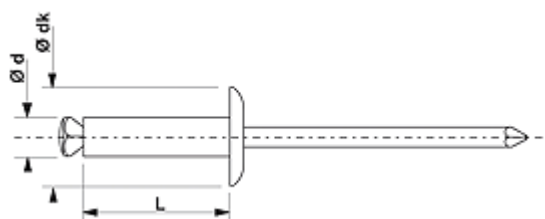

| Ø   | L  | DK  |  |  |  |  |  | BOÎTE CARTON |  | BOÎTE PLASTIQUE |  | BLISTER         |
|-----|----|-----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|---------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------|-----------------|
| mm  | mm | mm  | mm                                                                                  | mm                                                                                  | N                                                                                   | N                                                                                   | qté                                                                                 | ref          | qté                                                                                   | ref             | qté                                                                                   | ref             |
| 4,0 | 10 | 8,0 | 2,0 - 5,0                                                                           | 4,4                                                                                 | 1280                                                                                | 1150                                                                                | 500                                                                                 | 128 140 101  | -                                                                                     | -               | -                                                                                     | -               |
| 4,0 | 12 | 8,0 | 4,0 - 7,0                                                                           | 4,4                                                                                 | 1280                                                                                | 1150                                                                                | 500                                                                                 | 128 140 121  | -                                                                                     | -               | -                                                                                     | -               |
| 4,0 | 14 | 8,0 | 6,0 - 9,0                                                                           | 4,4                                                                                 | 1280                                                                                | 1150                                                                                | 500                                                                                 | 128 140 141  | -                                                                                     | -               | -                                                                                     | -               |
| 4,0 | 16 | 8,0 | 8,0 - 11,0                                                                          | 4,4                                                                                 | 1280                                                                                | 1150                                                                                | 250                                                                                 | 128 140 161  | 250                                                                                   | 128 140 161P    | 50/100                                                                                | 128 140 164 A/B |
| 4,0 | 18 | 8,0 | 10,0 - 13,0                                                                         | 4,4                                                                                 | 1280                                                                                | 1150                                                                                | 250                                                                                 | 128 140 181  | -                                                                                     | -               | -                                                                                     | -               |
| 4,0 | 20 | 8,0 | 12,0 - 15,0                                                                         | 4,4                                                                                 | 1280                                                                                | 1150                                                                                | 250                                                                                 | 128 140 201  | -                                                                                     | -               | -                                                                                     | -               |
| 4,0 | 25 | 8,0 | 15,0 - 20,0                                                                         | 4,4                                                                                 | 1280                                                                                | 1150                                                                                | 250                                                                                 | 128 140 251  | -                                                                                     | -               | 50                                                                                    | 128 140 254 A   |
| 4,0 | 30 | 8,0 | 20,0 - 25,0                                                                         | 4,4                                                                                 | 1280                                                                                | 1150                                                                                | 250                                                                                 | 128 140 301  | -                                                                                     | -               | -                                                                                     | -               |
| 4,8 | 10 | 9,5 | 1,0 - 4,0                                                                           | 5,2                                                                                 | 1800                                                                                | 2300                                                                                | 250                                                                                 | 131 148 101  | -                                                                                     | -               | -                                                                                     | -               |
| 4,8 | 12 | 9,5 | 3,0 - 6,0                                                                           | 5,2                                                                                 | 1800                                                                                | 2300                                                                                | 250                                                                                 | 131 148 121  | -                                                                                     | -               | -                                                                                     | -               |
| 4,8 | 14 | 9,5 | 5,0 - 8,0                                                                           | 5,2                                                                                 | 1800                                                                                | 2300                                                                                | 250                                                                                 | 131 148 141  | -                                                                                     | -               | -                                                                                     | -               |
| 4,8 | 16 | 9,5 | 7,0 - 10,0                                                                          | 5,2                                                                                 | 1800                                                                                | 2300                                                                                | 250                                                                                 | 131 148 161  | -                                                                                     | -               | -                                                                                     | -               |
| 4,8 | 18 | 9,5 | 9,0 - 12,0                                                                          | 5,2                                                                                 | 1800                                                                                | 2300                                                                                | 250                                                                                 | 131 148 181  | -                                                                                     | -               | -                                                                                     | -               |
| 4,8 | 20 | 9,5 | 11,0 - 14,0                                                                         | 5,2                                                                                 | 1800                                                                                | 2300                                                                                | 250                                                                                 | 131 148 201  | -                                                                                     | -               | -                                                                                     | -               |
| 4,8 | 25 | 9,5 | 14,0 - 19,0                                                                         | 5,2                                                                                 | 1800                                                                                | 2300                                                                                | 250                                                                                 | 131 148 251  | -                                                                                     | -               | -                                                                                     | -               |
| 4,8 | 30 | 9,5 | 19,0 - 24,0                                                                         | 5,2                                                                                 | 1800                                                                                | 2300                                                                                | 250                                                                                 | 131 148 301  | -                                                                                     | -               | -                                                                                     | -               |

## Application

- Automobile
- Plaques immatriculation
- Airbag

## Sur demande

Ø 3,2 - 6,4 et autres longueurs - TF Tête spéciale - Tête retenue - Autres couleurs et anodisation