


Produits/Rivets-Aveugles/Rivet-Standard/Alu-Acier/






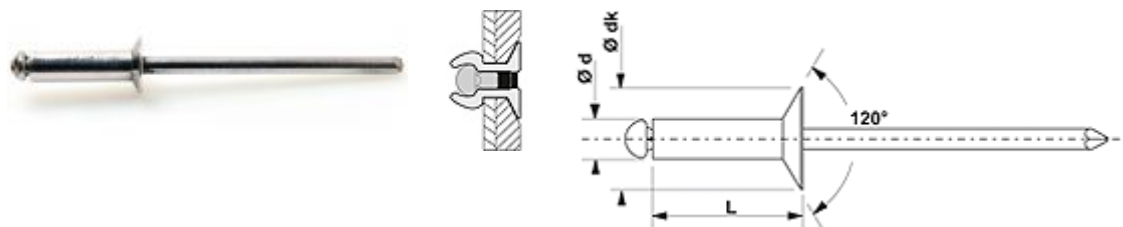

ALX TF 120 °

TÊTE FRAISÉE

CONFORME À LA NORME NF EN ISO 15978



ALUMINIUM ACIER ZINGUÉ

Ø	L	DK						BOÎTE CARTON		BOÎTE PLASTIQUE		BLISTER
mm	mm	mm	mm	mm	N	N	qté	ref	qté	ref	qté	ref
2,4	6	5,0	2,0 - 4,0	2,6	350	250	1.000	103 424 061	-	-	-	-
2,4	8	5,0	4,0 - 6,0	2,6	350	250	1.000	103 424 081	-	-	-	-
2,4	10	5,0	6,0 - 8,0	2,6	350	250	1.000	103 424 101	-	-	-	-
3,0	6	6,0	1,5 - 3,0	3,2	550	600	1.000	103 430 061	-	-	-	-
3,0	8	6,0	3,0 - 5,0	3,2	550	400	1.000	103 430 081	-	-	-	-
3,0	10	6,0	5,0 - 7,0	3,2	550	400	1.000	103 430 101	-	-	-	-
3,0	12	6,0	7,0 - 9,0	3,2	550	400	1.000	103 430 121	-	-	-	-
3,0	14	6,0	9,0 - 11,0	3,2	550	400	500	103 430 141	-	-	-	-
3,2	6	6,5	1,0 - 3,0	3,4	700	500	1.000	103 432 061	-	-	-	-
3,2	8	6,5	3,0 - 5,0	3,4	700	500	1.000	103 432 081	-	-	-	-
3,2	10	6,5	5,0 - 7,0	3,4	700	500	1.000	103 432 101	-	-	-	-
3,2	14	6,5	9,0 - 11,0	3,4	700	500	500	103 432 141	-	-	-	-
3,2	16	6,5	11,0 - 13,0	3,4	700	500	500	103 432 161	-	-	-	-
3,2	18	6,5	13,0 - 15,0	3,4	700	500	500	103 432 181	-	-	-	-
4,0	6	8,0	0,5 - 2,0	4,2	1800	1250	500	103 440 061	-	-	-	-
4,0	8	8,0	2,0 - 4,0	4,2	1800	1250	500	103 440 081	300	103 440 081P	-	-
4,0	10	8,0	4,0 - 6,0	4,2	1800	1250	500	103 440 101	300	103 440 101P	-	-
4,0	12	8,0	6,0 - 8,0	4,2	1800	1250	500	103 440 121	300	103 440 121P	-	-
4,0	14	8,0	8,0 - 10,0	4,2	1800	1250	500	103 440 141	-	-	-	-
4,0	16	8,0	10,0 - 12,0	4,2	1800	1250	500	103 440 161	200	103 440 161P	-	-
4,0	18	8,0	12,0 - 14,0	4,2	1800	1250	500	103 440 181	-	-	-	-
4,0	20	8,0	14,0 - 16,0	4,2	1800	1250	500	103 440 201	-	-	-	-
4,8	8	9,5	1,0 - 3,0	5,0	2600	1580	500	103 448 081	-	-	-	-
4,8	10	9,5	3,0 - 5,0	5,0	2600	1580	500	103 448 101	-	-	-	-
4,8	12	9,5	5,0 - 7,0	5,0	2600	1580	500	103 448 121	-	-	-	-
4,8	14	9,5	7,0 - 9,0	5,0	2600	1580	500	103 448 141	-	-	-	-
4,8	16	9,5	9,0 - 11,0	5,0	2600	1580	500	103 448 161	-	-	-	-
4,8	18	9,5	11,0 - 13,0	5,0	2600	1580	500	103 448 181	-	-	-	-
4,8	20	9,5	13,0 - 15,0	5,0	2600	1580	500	103 448 201	-	-	-	-
4,8	22	9,5	15,0 - 17,0	5,0	2600	1580	500	103 448 221	-	-	-	-
4,8	25	9,5	17,0 - 20,0	5,0	2600	1580	250	103 448 251	-	-	-	-
4,8	30	9,5	20,0 - 25,0	5,0	2600	1580	250	103 448 301	-	-	-	-
4,8	35	9,5	25,0 - 30,0	5,0	2600	1580	250	103 448 351	-	-	-	-

SUR DEMANDE

Ø 5 - 6 et 6,4 - TF 90° - Autres longueurs

Application

Automobile
Voiture
Equipement de loisirs
Raquette de neige
Mobilier, tables