


Produits/Rivets-Aveugles/Rivet-Standard/Inox-A2-Inox-A2/





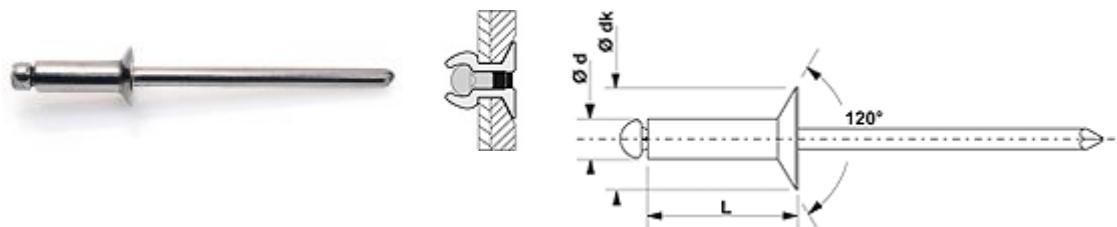


## INOX A2 TF 120 °

TÊTE FRAISÉE

CONFORME À LA NORME NF EN ISO 15984



INOX A2 INOX A2

Ø	L	DK						BOÎTE CARTON		BOÎTE PLASTIQUE		BLISTER
mm	mm	mm	mm	mm	N	N	qté	ref	qté	ref	qté	ref
3,0	6	6,0	1,0 - 3,0	3,2	2300	1900	500	105 430061	-	-	-	-
3,0	8	6,0	3,0 - 5,0	3,2	2300	1900	500	105 430 081	-	-	-	-
3,0	10	6,0	5,0 - 7,0	3,2	2300	1900	500	105 430 101	-	-	-	-
3,0	12	6,0	7,0 - 9,0	3,2	2300	1900	500	105 430 121	-	-	-	-
3,2	6	6,5	1,0 - 3,0	3,4	2500	1900	500	105 432 061	-	-	-	-
3,2	8	6,5	3,0 - 5,0	3,4	2500	1900	500	105 432 081	-	-	-	-
3,2	10	6,5	5,0 - 7,0	3,4	2500	1900	500	105 432 101	-	-	-	-
3,2	12	6,5	7,0 - 9,0	3,4	2500	1900	500	105 432 121	-	-	-	-
4,0	6	8,0	0,5 - 2,0	4,2	3500	2700	500	105 440 061	-	-	-	-
4,0	8	8,0	2,0 - 4,0	4,2	3500	2700	500	105 440 081	-	-	-	-
4,0	10	8,0	4,0 - 6,0	4,2	3500	2700	500	105 440 101	-	-	-	-
4,0	12	8,0	6,0 - 8,0	4,2	3500	2700	500	105 440 121	-	-	-	-
4,0	16	8,0	8,0 - 12,0	4,2	3500	2700	500	105 440 161	-	-	-	-
4,8	8	9,5	1,0 - 3,0	5,0	5000	4000	250	105 448 081	-	-	-	-
4,8	10	9,5	3,0 - 5,0	5,0	5000	4000	250	105 448 101	-	-	-	-
4,8	12	9,5	5,0 - 7,0	5,0	5000	4000	250	105 448 121	-	-	-	-
4,8	14	9,5	7,0 - 9,0	5,0	5000	4000	250	105 448 141	-	-	-	-
4,8	16	9,5	9,0 - 11,0	5,0	5000	4000	250	105 448 161	-	-	-	-
4,8	20	9,5	11,0 - 15,0	5,0	5000	4000	250	105 448 201	-	-	-	-

### SUR DEMANDE

Pour toute demande spéciale, n'hésitez pas à nous contacter

#### Application

Chauffage  
Ventilation  
Air conditionné  
Équipement industriel  
Machines  
Four industriel  
Boulangerie  
Appareil médical